

Carpenter Styrofold® Underlayment Board makes new siding more than just beautiful.

- Helps reduce the cost of heating and cooling.
- Covers cracks, gaps and seams in the old siding to stop air infiltration.
- Straightens walls to allow new siding to lay straight, flat and beautiful.
- Provides rigid support for new siding to give walls a more solid "feel".
 - Allows moisture to escape, keeps the weather out.
 - Helps prevent dry rot, mildew and structural damage caused by moisture.
 - Keeps out noise, dust and pollen.
 - Increases the value of the home.

Carpenter Styrofold® is scored and folded so that it's easy to carry, transport, and install.

Carpenter Styrofold® Underlayment helps protect against unnecessary energy loss. The R-value is a measurement used to determine the ability of a system to resist thermal transfer:

3/8" Thick Carpenter Styrofold®

Carpenter Styrofold® Underlayment Board (based on 1.0 pcf density)	1.44
Reflective air space (average 3/8")	2.19
Air space (average 3/8")	1.03
New siding	0.61
Outside air film	0.17
SUBTOTAL	5.44
Existing 4" wall	13.60
TOTAL R-VALUE	19.04

Your New Siding Adds Beauty. Carpenter Styrofold® Underlayment Board Adds Comfort and Protection.

When you re-side your home, you can add an important layer of comfort and protection as the new siding is installed. Carpenter Styrofold® Underlayment Board is the comfort protector that guards against air infiltration in your home. It keeps the weather out, yet it allows harmful moisture to escape from inside. It actually breathes.

Carpenter Styrofold® Underlayment Board is a combination of tough, energy-efficient expanded polystyrene insulation and heavy-duty facings. All year long, it wraps your home in a layer of protective comfort.

Carpenter Styrofold® Facts And Figures




Core insulation	Expanded polystyrene
Available thicknesses	1/4", 3/8", 1/2", 3/4"
Available densities	0.65 pcf - 2.0 pcf
Available facers	Foil, white kraft, brown kraft, poly-coated white kraft
Packaging	2' x 4' bundle, unfolds to 4' x 12' sheets or 4' x 48' sheets

For exact R-value information, please ask your supplier or sales representative.

CARPENTER
STYROFOLD



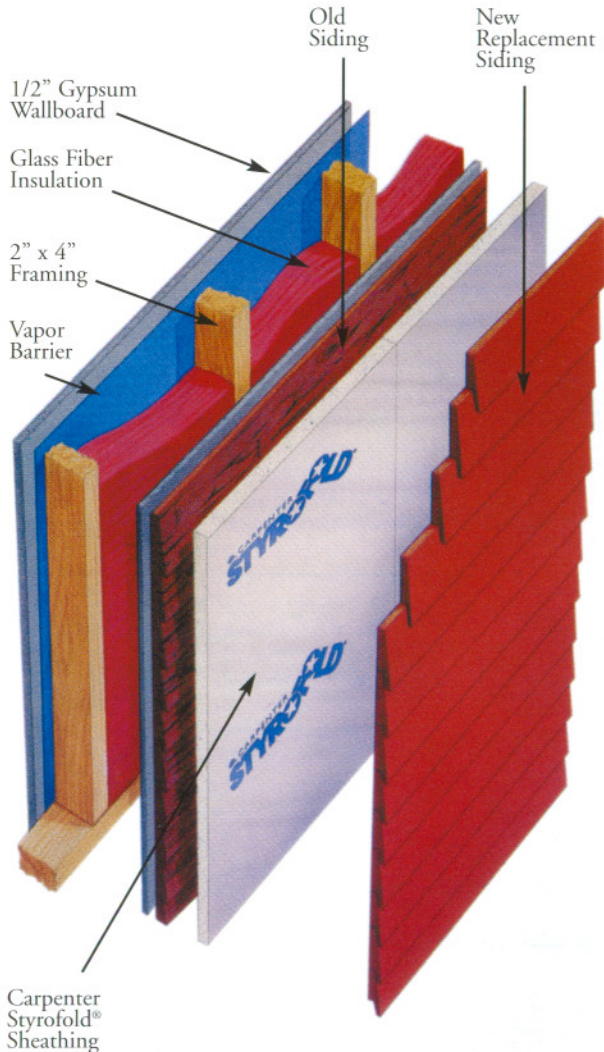

Carpenter Styrofold® Sheathing

Code Compliance

In addition to being UL Listed, Carpenter Styrofold® complies with the flammability requirements of BOCA, ICBO and SBCCI.

Warranty and Remedy Information.

Carpenter Co. ("Carpenter") warrants it will replace without charge and Carpenter product that is not merchantable because of defects in materials or workmanship. Notice of a claim under this warranty must be given promptly in writing, in no case later than 45 days after the defect becomes known to the purchaser. THIS EXPRESS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THE REMEDY OF REPLACEMENT IS THE SOLE AND EXCLUSIVE REMEDY ARISING FROM THE SALE OF CARPENTER'S PRODUCTS. IN NO CASE WILL CARPENTER BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL LOSS OR DAMAGE, including without limitation, damage to other property, loss of profits, loss of goodwill, or other economic loss whether such incidental or consequential loss or damage is claimed on account of breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory. GOODS SOLD FOR RESALE ARE ALL SUBJECT TO THE TERMS, AND ALL OFFERS ARE EXPRESSLY CONDITIONED UPON ACCEPTANCE OF THESE TERMS.

Warning!

EPS foam is flammable. Modified EPS, like most plastic foams, is flammable. Do not expose EPS to open flames or other direct or indirect high temperature ignition sources such as burning operations, welding, burning cigarettes, space heaters or naked lights. When burning, EPS will consume oxygen, releasing great heat and smoke and potentially toxic gases such as carbon monoxide and carbon dioxide. Install only in strict compliance with BOCA, ICBO or SBCCI codes. Failure to comply with these codes may increase the risk of fire and result in personal injury or property damage from smoke, flames or water.

CCID-10-703
 © 2003 Carpenter Co.
 Carpenter Styrofold is a registered trademark of Carpenter Co.
 "We bring comfort to your life." is a trademark of Carpenter Co.



Carpenter Co.
 5016 Monument Avenue
 P.O. Box 27205
 Richmond, VA 23261

Lakeland, FL
 (800) 723-7749
 (863) 688-3703 FAX

High Point, NC
 (800) 723-1633
 (336) 861-6366 FAX

Conyers, GA
 (800) 723-3650
 (770) 388-0048 FAX

Fogelsville, PA
 (800) 388-8004
 (610) 395-1773 FAX



Underlayment Insulation

New siding provides instant beauty. Carpenter Styrofold® Insulation saves energy and enhances comfort. That's the real beauty of it.

