


EXTRASTEP[®]




YOUR COMFORT ZONE

Density Rating

Product Specification

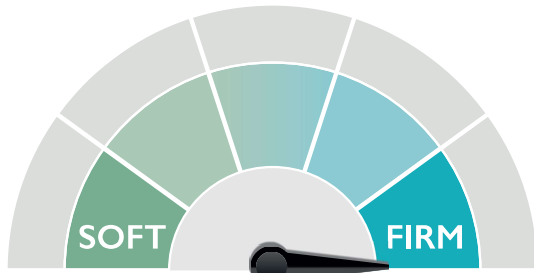

COMFORT

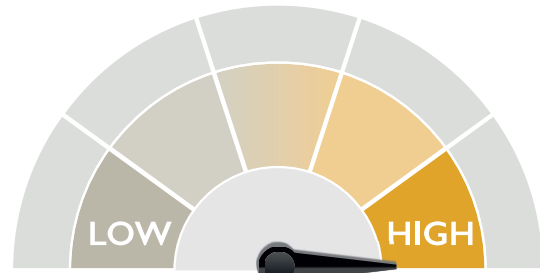

SUPPORT

Thermal Insulation : 1.5 tog

Sound Insulation : 33 dB

Product Thickness : 6 mm

Usage : Domestic and Heavy Contract



For double stick installations, please refer to your adhesive manufacturer for recommended adhesives.

CHARACTERISTIC	SPECIFICATION	TEST METHOD
Classification of Reaction to Fire Performance In Accordance With EN 13501-1:2007 +A1:2009		CFL s1
Double Stick Castor Wheel Chair Test	25000+	
International Code For Application Of Fire Test Procedures	PASS	IMO Resolution A653 (16) IMO Resolution MSC61 (67) Annex 1 Part 5 and Annex 2 IMO Resolution MSC61 (67) Annex 1 Part 2 and Annex 2

CARPENTER UNDERLAY[®]



100% Recyclable - Proudly Made in the United Kingdom



Disclaimer: The properties mentioned in this document are the result of laboratory tests according to BS14499 provided solely for information purposes only. They are not guaranteed to be achieved in practice. Users should conduct their own tests to determine the suitability of each product for its intended application.

Prostep and Carpenter Underlay are registered trademarks of Carpenter Co.

For any further information contact us on +44 (0) 1457 861141