


# PROSTEP<sup>®</sup>




## YOUR COMFORT ZONE

Density Rating

### Product Specification

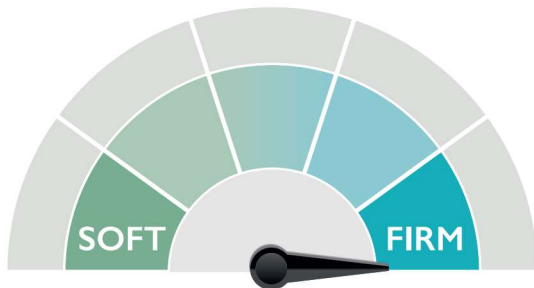

**COMFORT**

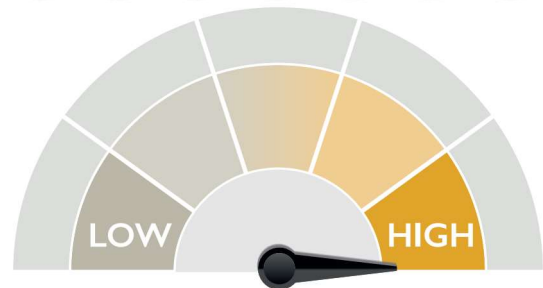

**SUPPORT**

**Thermal Insulation :** 2.07 tog

**Sound Insulation :** 36 dB

**Product Thickness :** 8 mm

**Usage :** Domestic and Heavy Contract

**180 Kg/m<sup>3</sup>**

DOUBLE STICK

For double stick installations, please refer to your adhesive manufacturer for recommended adhesives.

CHARACTERISTIC	SPECIFICATION	TEST METHOD
Classification of Reaction to Fire	Fire Behaviour CFL s1	EN 13501-1:2007+AI (2009)
Double Stick Castor Wheel Chair Test	25000+	

 **CARPENTER**  
**UNDERLAY<sup>®</sup>**



100% Recyclable - Proudly Made in the United Kingdom



Disclaimer: The properties mentioned in this document are the result of laboratory tests according to BS14499 provided solely for information purposes only. They are not guaranteed to be achieved in practice. Users should conduct their own tests to determine the suitability of each product for its intended application.

Prostep and Carpenter Underlay are registered trademarks of Carpenter Co.

For any further information contact us on +44 (0) 1457 861141