

CARPOL[®] GP-3510

Polyether Polyol

CARPOL[®] GP-3510 is a glycerin-initiated polyether polyol. The resulting polyol has a functionality of three and a molecular weight of 3500 Da. This triol is polymerized using both propylene oxide and ethylene oxide. The ethylene oxide is internally located yielding a polyol with controllable reactivity. This polyol is primarily used for flexible slabstock foam, however, it may also be included as a component in RIM products and other specialty formulations and applications.

Typical End Use Applications

- Furniture
- Bedding
- Automotive Trim Parts
- Carpet Cushion
- Flexible Foam


Typical Analytical Properties*

Hydroxyl Number (mg KOH / g)	47
pH (10 parts of IPA: 6 parts of H ₂ O)	7.0
Moisture (%) [maximum]	0.04
Color (APHA) [maximum]	35
Appearance	Free & Clear
Viscosity @ 25 °C (cP)	500
Density @ 25 °C (lb / gal)	8.52
Potassium (ppm) [maximum]	5.0

*Please note that these values are not specifications

Updated February 2019

Viscosity Profile

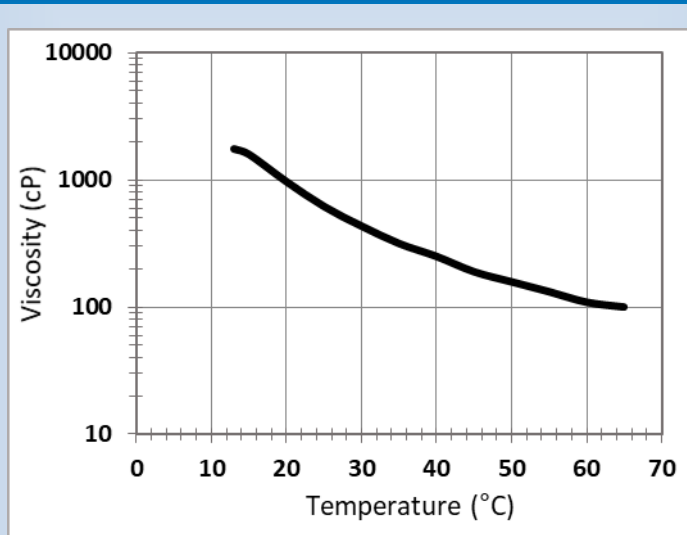

Viscosity Information

77 °F	100 °F	120 °F
500 cP	190 cP	160 cP

Storage Information

CARPOL[®] GP-3510 will absorb water if the product container is not secured properly. This may affect reactivity, appearance, and performance. Therefore, it is advised that all receptacles containing this material be tightly fastened and stored in a dry place.

Consult the Safety Data Sheet for additional information.

Health and Safety Information

Health and safety information is available in the form of a Safety Data Sheet. This literature, describing proper precautions and personal protective gear, is available for review. To receive this information please contact a Carpenter Co. representative.

Ordering and Shipping Options

CARPOL[®] GP-3510 can be acidified to a nominal pH of either 5 or 6 upon request. These materials are denoted as CARPOL[®] GP-3510-50 polyether polyol and CARPOL[®] GP-3510-60 polyether polyol, respectively.

<u>Sample Sizes</u>	<u>Products Packaged/Shipped</u>
1 quart	Drum 460 lb net wt.
1 gallon	Totebin 2,300 lb net wt.
5 gallon	Tankwagon 40,000-45,000 lb net wt. Railcar 185,000-189,000 lb net wt.

For additional information please contact:
Carpenter Co.
Chemicals Division
Customer Service 800-260-5373
5016 Monument Avenue
Richmond VA 23230

Updated 10 Feb 2019

Important: The information contained in this product data sheet is offered for your consideration, investigation, and verification. The data is presented in good faith and is believed to be reliable. Carpenter, however, makes no representation as to the completeness or accuracy. Carpenter makes no warranty, express or implied, with respect to the data contained herein. Carpenter cannot anticipate all conditions under which this data and the product may be used. The conditions of handling, storage, use, and disposal of the product are beyond Carpenter's control. Thus we expressly disclaim responsibility or liability for any loss, damage, or expense arising out of reliance on the information contained herein. You are advised to make your own determination as to safety, suitability, and appropriate manner of handling, storage, use, and disposal. For further information please consult the appropriate Carpenter Safety Data Sheet. **Warning:** These products can be used to prepare a variety of polyurethane products. Polyurethanes are organic materials and must be considered combustible.